




## Demolition grabs



**HYDRAULIC  
HAMMERS**

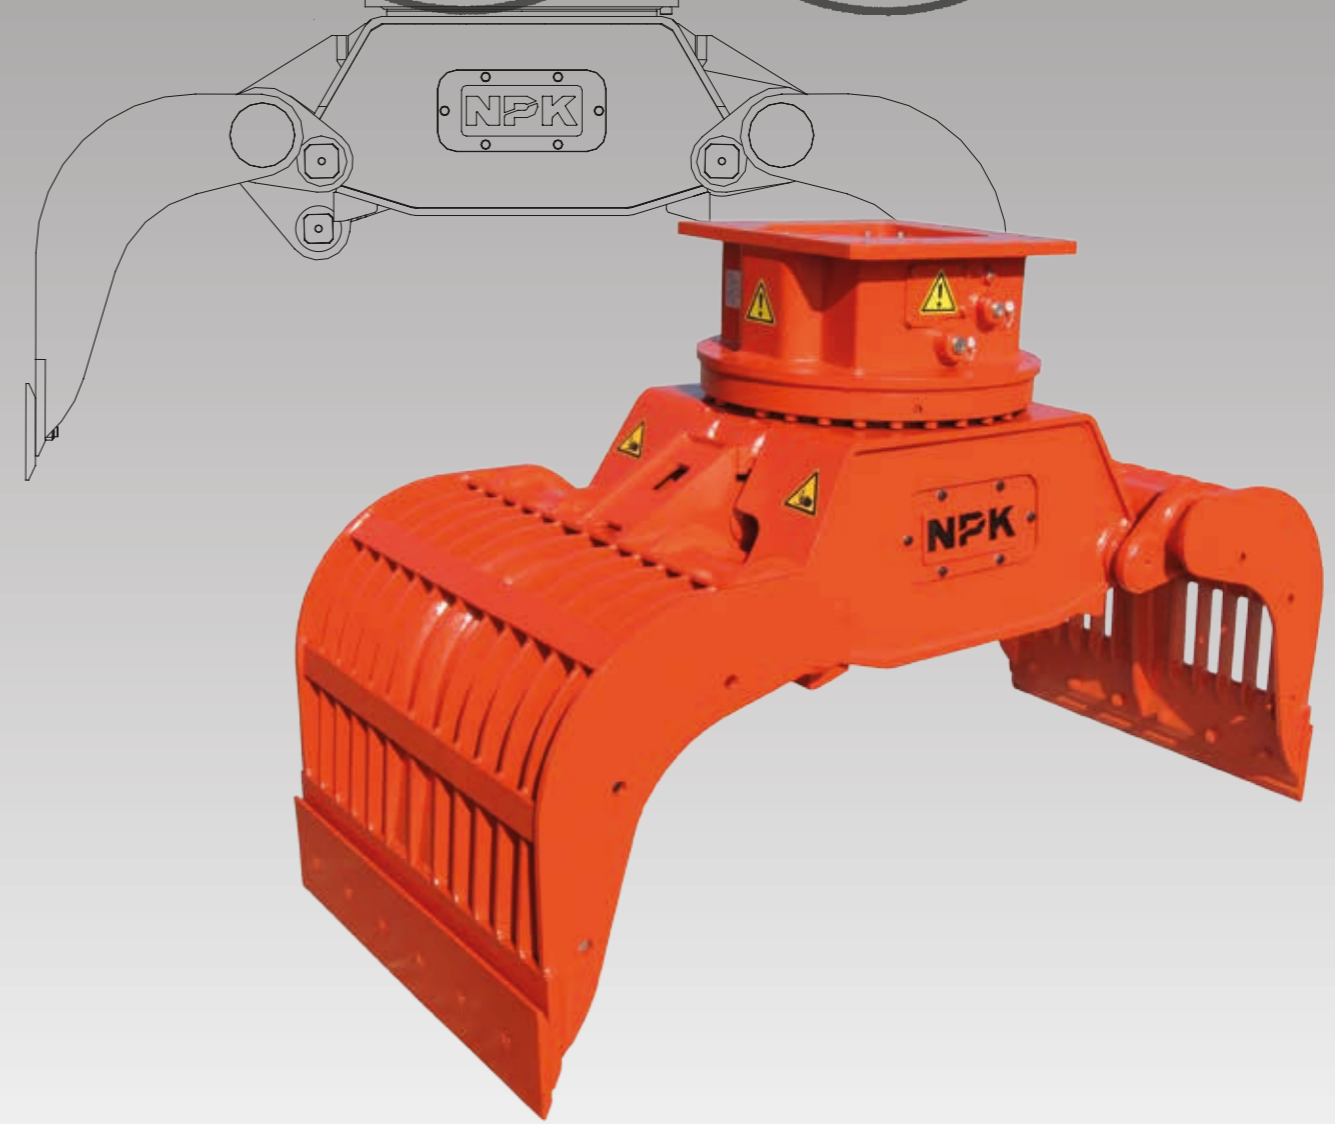

**SHEET PILERS**



**STEEL SHEARS**



**X-Y-Z CONCEPT**



**COMPACTORS**



**CRUNCHERS**



**CRUSHERS**



**DEMOLITION  
GRABS**



**MULTI-  
PROCESSORS**



Dealer:

**NPK Europe (Holland) BV**

P. O. Box 30157  
3001 DD Rotterdam  
The Netherlands  
Tel: +31 10 205 1710  
Fax: +31 10 205 1715  
E-mail: info@npke.nl

DG\_SERIES\_01\_04\_2017\_EN

## Demolition, recycling, loading...

NPK demolition and dismantling grabs are versatile, 360° hydraulically rotatable, attachments manufactured from wear resistant steel alloy. The grabs of the DG-series allow reduced operation costs for demolition, dismantling, loading, sorting and recycling applications.

Specialist hardening processes and welding procedures, along with heavy duty components, guarantee superb quality and a long life. To add to these features only the best hydraulic components, which have been fully protected within the design, are used. As with other NPK attachments these grabs offer an excellent return on investment.

The DG-1, DG-4, DG-6 and DG-9 are equipped with an hydraulic rotator, offering a compact solution, also giving less and easier maintenance with high durability. Its speed is unaffected by varying oil flows (5 - 25 l/min). The DG-14, DG-16, DG-20, DG-30, DG-40 and DG-50 are manufactured with a high quality bearing. All grabs have a flat top fixing, making it simple to use any bolt-on adaptor bracket, matching the mechanical/hydraulic quick hitch or directly to any brand of excavator.

Clam cutters are interchangeable and as an option, side covers are available for loading activities.



### TECHNICAL SPECIFICATIONS



Model	DG-1	DG-4	DG-6	DG-9	DG-14	DG-16	DG-20	DG-30	DG-40	DG-50
Excavator weight (t)	0,7 - 1,5	2,5 - 4	4 - 6	5 - 9	7 - 14	10 - 16	14 - 20	18 - 30	25 - 40	35 - 50
Weight (kg)	75	172	290	450	642	875	1230	1850	2050	2500
Capacity (L)	25	90	150	180	300	425	500	800	900	1100
Working pressure (MPa)	18 - 26	18 - 26	20 - 28	22 - 32	25 - 35	25 - 35	25 - 35	25 - 35	25 - 35	25 - 35
Oil flow (l/min)	10 - 20	15 - 35	20 - 40	30 - 50	30 - 60	60 - 100	60 - 100	80 - 120	80 - 120	100 - 140
Closing force (kN)	6	15	21	32	38	48	52	72	72	90
Rotation:										
Working pressure (MPa)	16 - 26	18 - 26	20 - 28	22 - 32	10 - 14	10 - 14	10 - 14	10 - 14	10 - 14	10 - 16
Oil flow (l/min)	5 - 18	12 - 22	15 - 25	18 - 25	20 - 30	20 - 30	20 - 30	20 - 30	20 - 30	30 - 50
Dimensions:										
A (mm)	640	1145	1355	1632	1800	1850	2050	2410	2410	2450
B (mm)	595	800	905	1035	1175	1235	1300	1485	1485	1560
Width (mm)	300	450	500	580	700	860	950	1115	1360	1450

Specifications subject to change without prior notice

## FEATURES

- Fully protected hydraulic components.
- Interchangeable clam cutters. (HB500)
- Frame made of high strength steel/HARDOX
- 360° Hydraulic rotation, no drain line required.
- Large straight jaw opening.
- Easy maintenance.
- In one position greaseable.
- Replaceable pin bushings.
- Low cost, high efficiency.
- Cage construction of the jaws, made of HARDOX 400.
- Main pins equipped with dust seals.
- High closing force.
- Double shock valve protects motor (DG-14, DG-16, DG-20, DG-30, DG-40 and DG-50).
- Pilot check valve standard from DG-14 and up.
- One powerful cylinder.

